





MK06 Short Guide



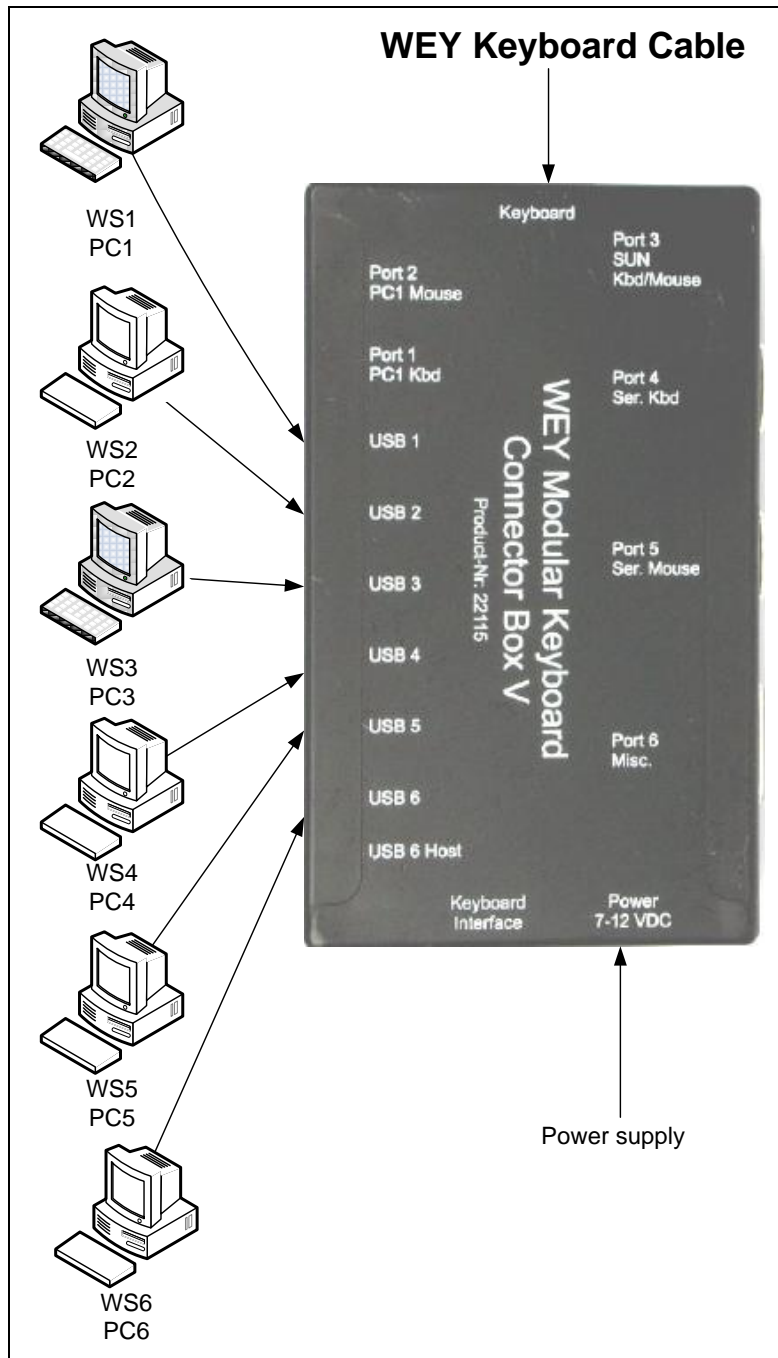

MK06 Short Guide

Connector Box V(a)

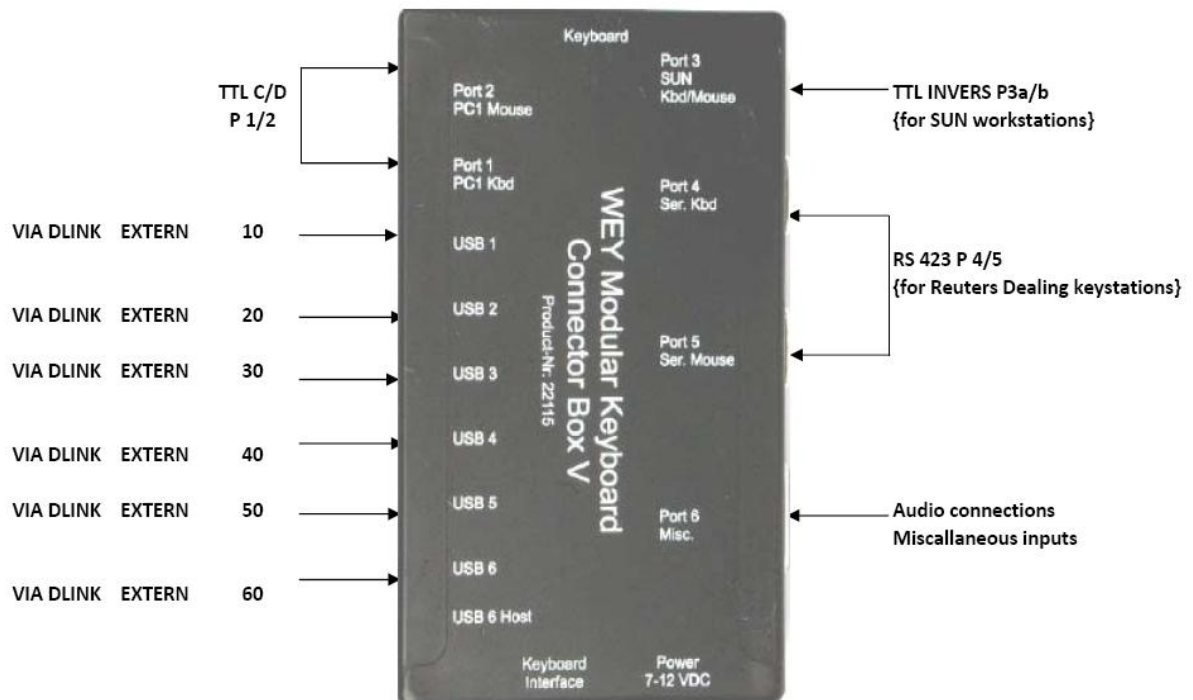



MK06 Short Guide

Configuring a WS button for a standard PC

- 1 <Ctrl><Alt><Logoff System> to get into configuration mode
- 2 [Config WS x]{corresponds to the WS button that is being programmed}
- 3 [PC EMU] sets the emulation used by the keyboard
- 4 Press <RETURN>
- 5 Choose the correct interface{where the PC is connected to the Connector Box}
 - a. Choose [TTL C/D P 1/2] for first PS2 port
 - i [Com Setup KBD] should be set to [Default Values]
 - ii Press <RETURN> and <ESCAPE>
 - iii [Com Setup Mouse] should be set to [Default Values]
 - iv Press <RETURN> and <ESCAPE>
 - b. Choose [VIA DLINK EXTERN] for subsequent ports {see Connector Box pages}
 - i Choose correct interface port according to type of Connector Box {see Connector Box pages}
- 6 Press <RETURN> and <ESCAPE> to get back to the main menu of configuration mode
- 7 Repeat with other WSs if necessary
- 8 Press <ESCAPE> to reboot the keyboard

v1.0